


SET LAUFEN PRO N

Wallhung WC pan

82095.8



TECHNICAL DATA

Order no.	82095.8
Certified to	EN 997, EN 33
Specification	Washdown for min. 4/2-l-flush
Weight	14,0 kg
Accessories excl.	Seat and cover, order no. 89095.0 Seat and cover with automatic lowering system, order no. 89095.1
Colours	see colour table

SPECIFICATION TEXT


Wallhung WC pan washdown LAUFEN PRO N, sanitary ceramic, for concealed cistern

EN 997, EN 33, min. 4/2-l-flush, dimensions 360 x 500 x 350 mm

Special feature: concealed surfaces directing water are fully glazed throughout, open water rim, vacuum checked

Further options / accessories: Surface refinement LCC, WC seat and cover, 89195.0, WC seat and cover with automatic lowering 89095.1
Order no. 82095.8

TECHNICAL DRAWINGS / S 1 : 20

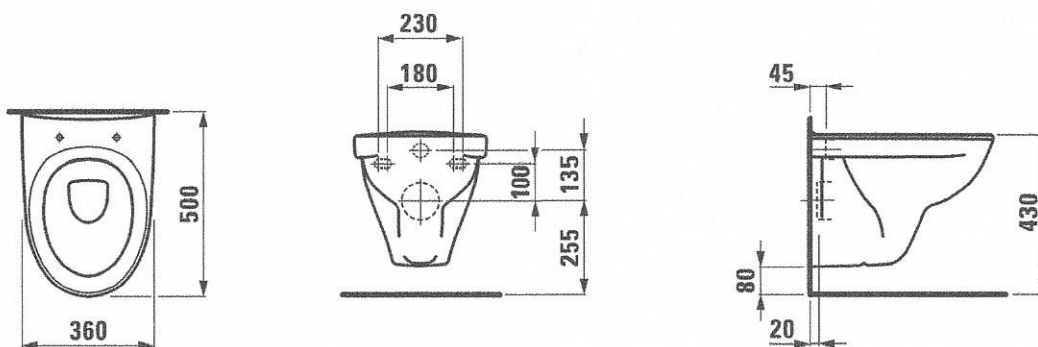

SET KOMPAS
Seat and cover
89115.2



TECHNICAL DATA

Order no.	89115.2
matching for	Floorstanding WC rimless, order no. 82715.0, 82715.1, 82715.2, 82715.3, 82715.4, 82715.5 Wallhung WC rimless, order no. 82015.0
Specification	not removable with fixation from below
Weight	1,9 kg
Mounting acc.	included
Colours	see colour table

SPECIFICATION TEXT

WC seat and cover Laufen-KOMPAS, Duroplast
not removable, with fixation from below
matching floorstanding WC rimless, order no. 82715.0, 82715.1, 82715.2, 82715.3, 82715.4, 82715.5 and wallhung WC rimless, order no. 82015.0
Order no. 89115.2

NOTEPAD
LAVET AF 2017-01-30 -
12:47

GROHE.COM

*Pure Freude
an Wasser*

GROHE
~~~~~






# MOMENTS OF TRUTH

GROHE's Masters of Technology announce the innovative quality of their work in so-called "Moments of Truth". These are the moments when the end-user becomes aware of the tangible benefits that the product offers, as well as the achievement that it represents, for the very first time. At these times, all the efforts that have gone into research, development, production and refinement result in genuine delight and authentic satisfaction for the customer.



## GROHE SilkMove®

Smoothest handling for effortless precision and ultimate comfort for a lifetime.

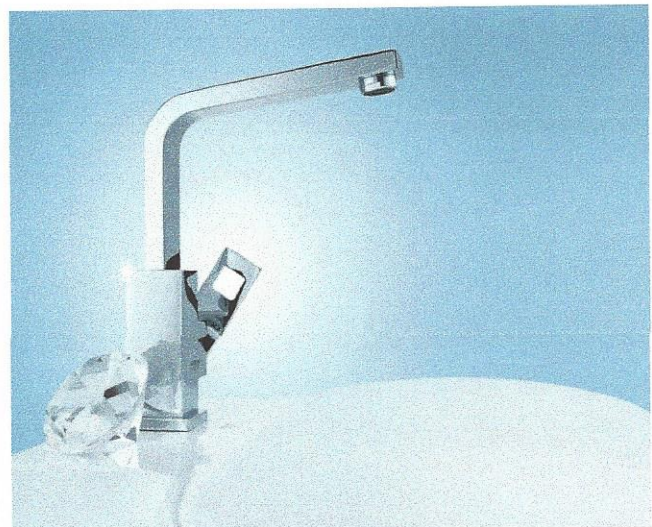


## GROHE StarLight®

Made-to-last surfaces ranging from precious matt to shiny like a diamond.



## GROHE CoolTouch®

No scalding on hot surfaces thanks to 100% GROHE CoolTouch®.

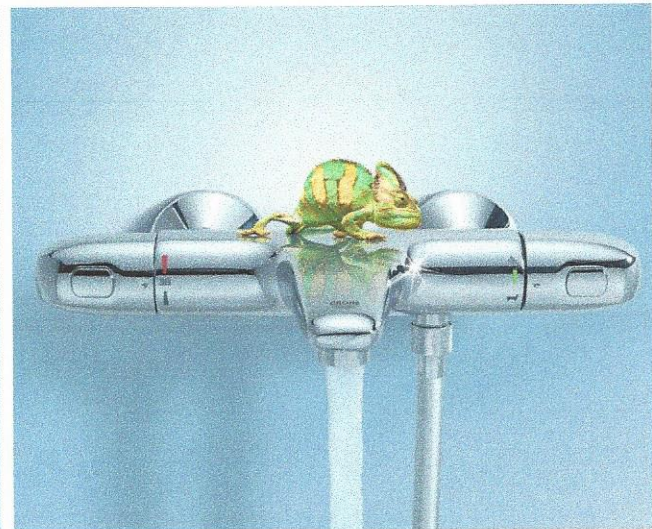

## GROHE TurboStat®


Always the right temperature, for utmost convenience and safety.





**GROHE EcoJoy**

Save precious resources and enjoy 100% water comfort.

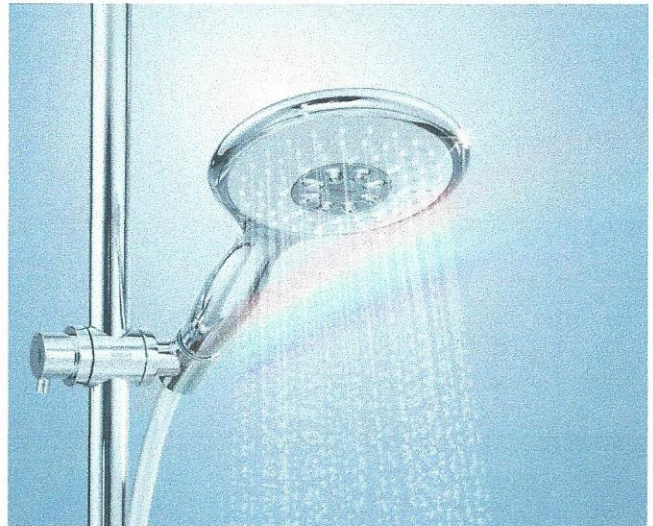

**GROHE DreamSpray®**

Innovative quality showers for luxurious revitalisation and wellbeing.



**GROHE QuickFix®**

Faster, easier and hassle-free, GROHE QuickFix® cuts installation time by up to 40%.

# INDHOLD

|                                                            |   |
|------------------------------------------------------------|---|
| 33 281 002 Eurosmart Etgrebs køkkenbatteri, DN 15          | 1 |
| 33 265 002 Eurosmart Etgrebsbatteri til håndvask, S - Size | 1 |
| 34 561 000 Grohtherm 800 Termostatbatteri til brus, DN 15  | 2 |



Grohe nr. VVS no. Farve

33 281 002 705804404 chrome



33 281 002 Eurosmart Etgrebs køkkenbatteri, DN 15

lav tud  
ethulsmontage  
GROHE StarLight® finish  
GROHE SilkMove® 35mm keramisk patron  
integreret temperaturbegrænser  
indstillelig volumenbegrænser  
svingbar tud  
svingfelt 140°  
særskilte indvendige vandveje - bly og nikkelfri  
Mousseur med "mønt-rille" for værktøjsfri udskiftning  
fleksible tilslutningslanger 3/8"  
system til hurtig montage  
min. tryk 1,0 bar

1

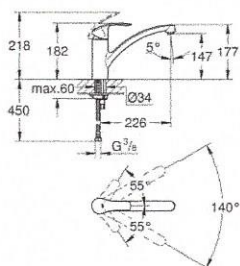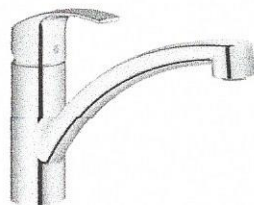

2



33 265 002 702200404 chrome




33 265 002 Eurosmart Etgrebsbatteri til håndvask, S - Size

ethulsmontage  
metalgreb  
GROHE SilkMove® 35mm keramisk patron  
indstillelig volumenbegrænser  
med temperaturbegrænser  
GROHE StarLight® krom  
GROHE EcoJoy® mousseur 5,7 l/min  
GROHE QuickFix® rapid installationssystem  
løftestang med bundventil 1 1/4"  
fleksible tilslutningslanger 3/8"

Grohe nr. VVS no. Farve

34 561 000 722311004 chrome

3



34 561 000 Grohtherm 800 Termostatbatteri til brus, DN 15

vægmonteret  
**GROHE StarLight®** krom  
 med **GROHE SafeStop** ved 38° C  
**GROHE SafeStop Plus** (ekstraudstyr)  
 yderligere temperaturbegrænsning ved 43° C  
**GROHE TurboStat®** kompakt termostatelement  
 integreret blandingspærre  
 reguleringsgreb med **GROHE EcoButton**  
 (individuel EcoButton justerings stop)  
 keramisk overdel 1/2", 180°  
 bruserafgang ned 1/2"  
 indbyggede kontraventiler  
 snavssamlere  
 med kontraventil  
 uden tilslutninger  
 min. tryk 1,0 bar  
**GROHE EcoJoy®**-teknologi for et mindre  
 vandforbrug og perfekt vandgennemstrømning




NOTEPAD  
LAVET AF 2017-01-30 -  
12:47

|                    |            |
|--------------------|------------|
| Date               | 30.01.2017 |
| Number of products | 3          |

GROHE.COM

NOTER

A series of horizontal grey lines representing a notepad grid, intended for taking notes.

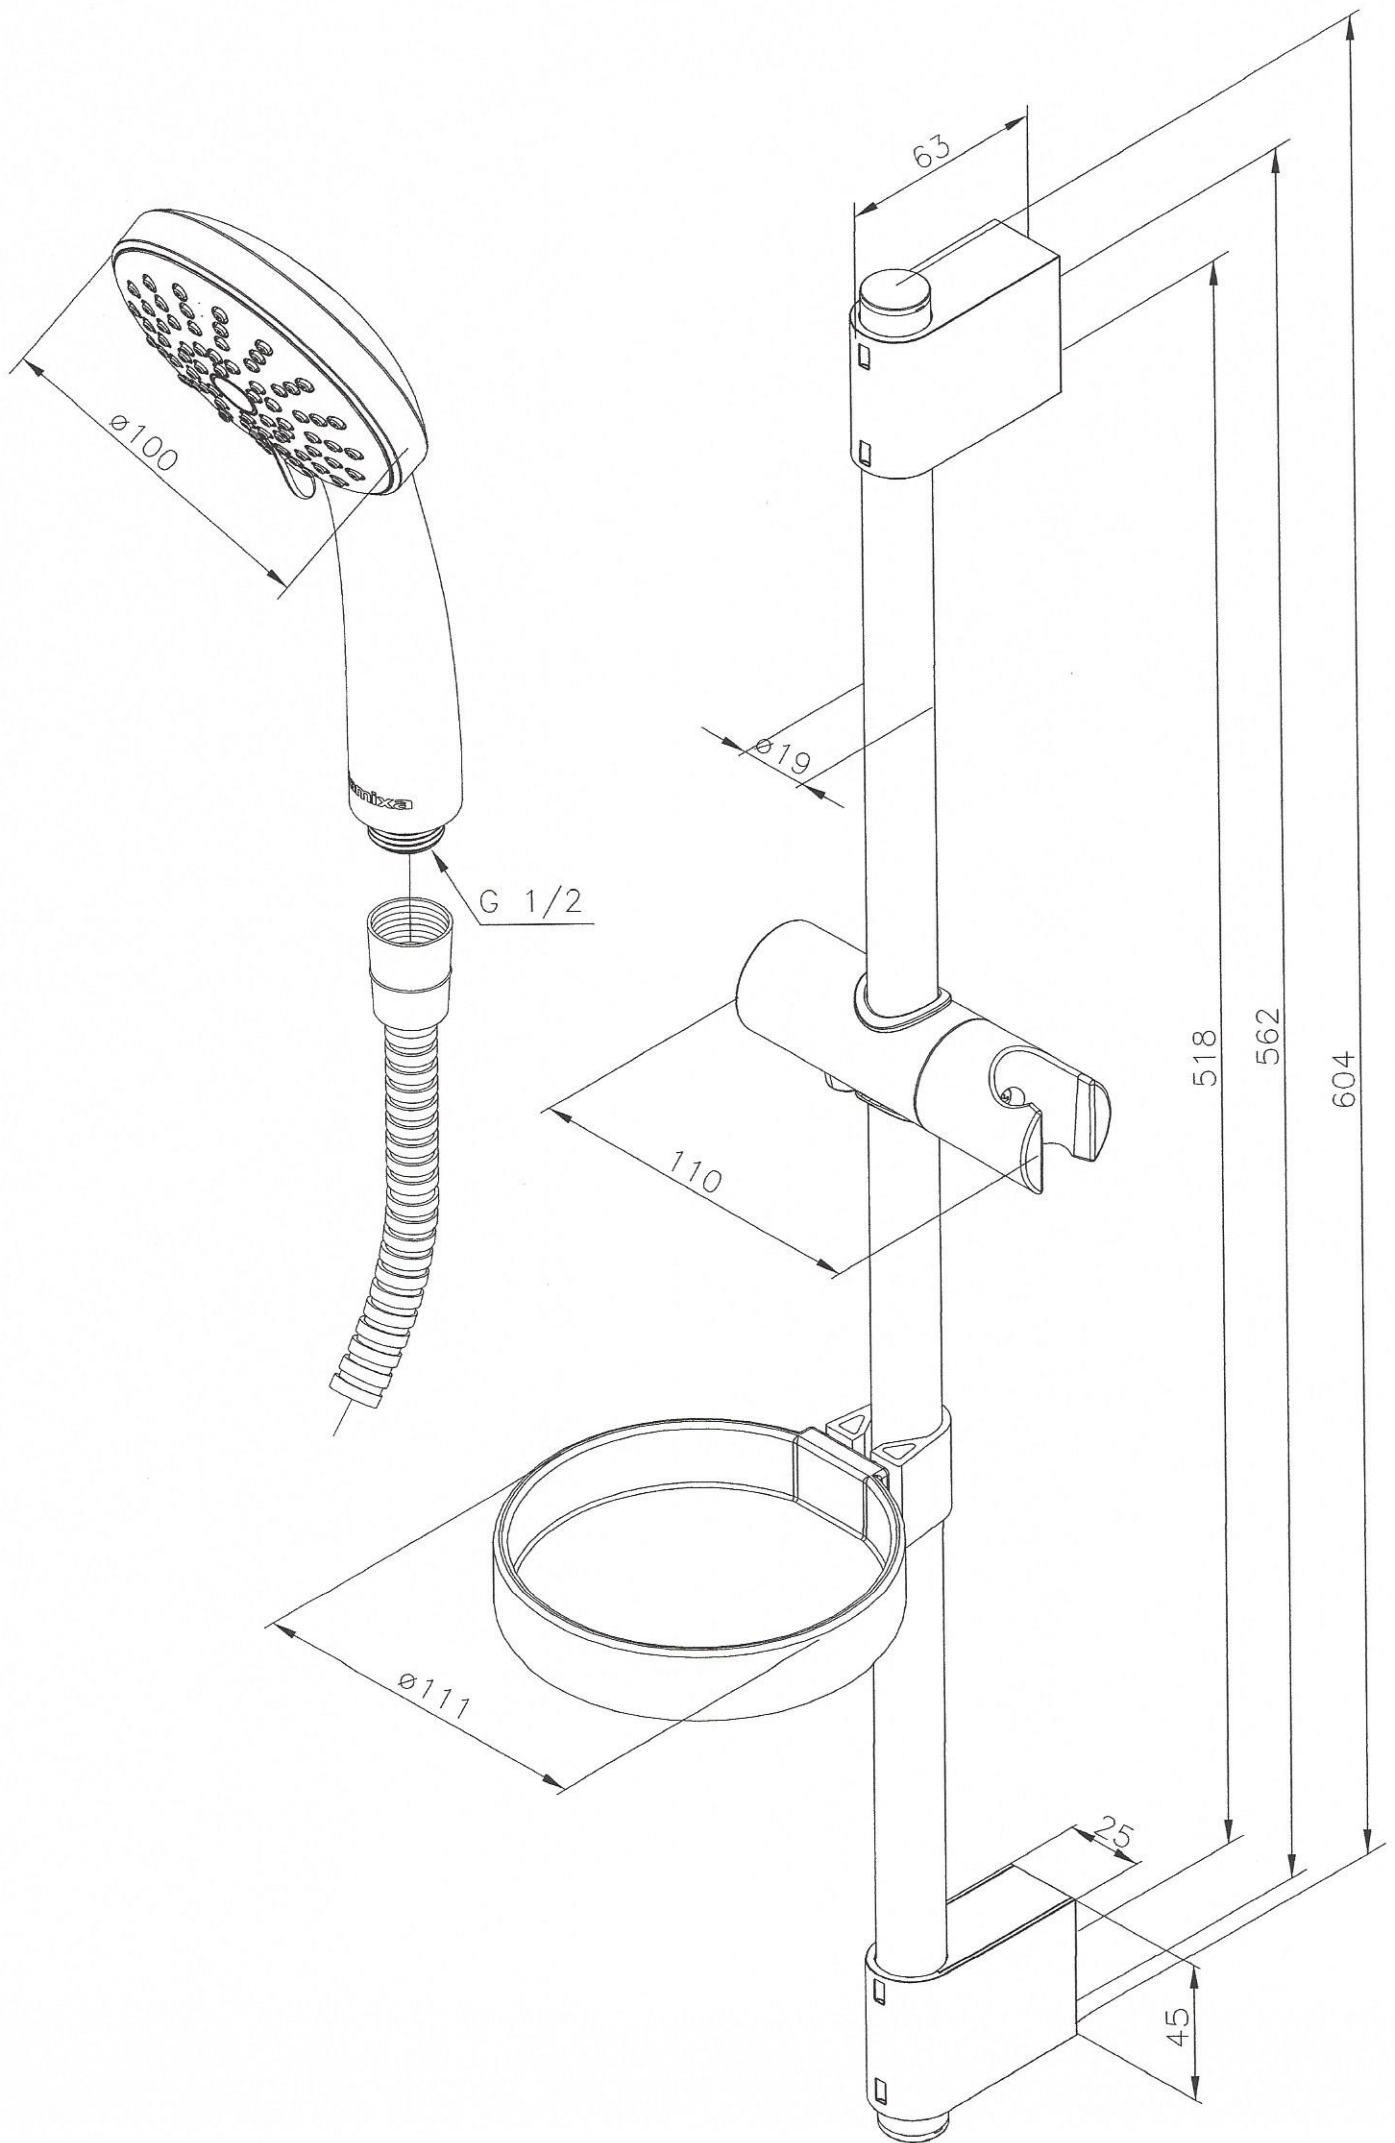



# cim 2185

## Washing machine double spindle valve

### Product Specifications



- Washing machine double spindle valve 1/2" x 3/4" cover plate, chrome plated with no backflow spindle and special conical nut.
- Working pressure:
  - Min: Above 0,5 bar
  - Max: 10 bar
  - Recommended: 0,5 ÷ 5 bar
- Working temperature:
  - Min: 5°C
  - Max: 95°C
  - Recommended: 5 ÷ 65 °C

Reference standards: EN ISO 3822

### Materials

1. Body: Brass - EN 12165 CW617N;
2. Handle: Chrome plated ABS;
3. Handle: Chrome plated ABS;
4. Blue cap: NYLON;
5. Spindle: Brass - EN 12164 CW614N;
6. Spindle: Brass - EN 12164 CW614N;

### Main dimensions

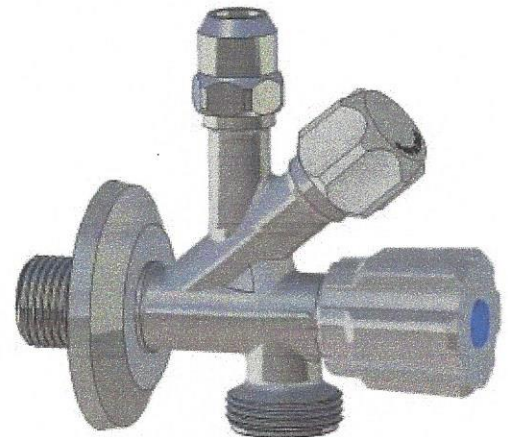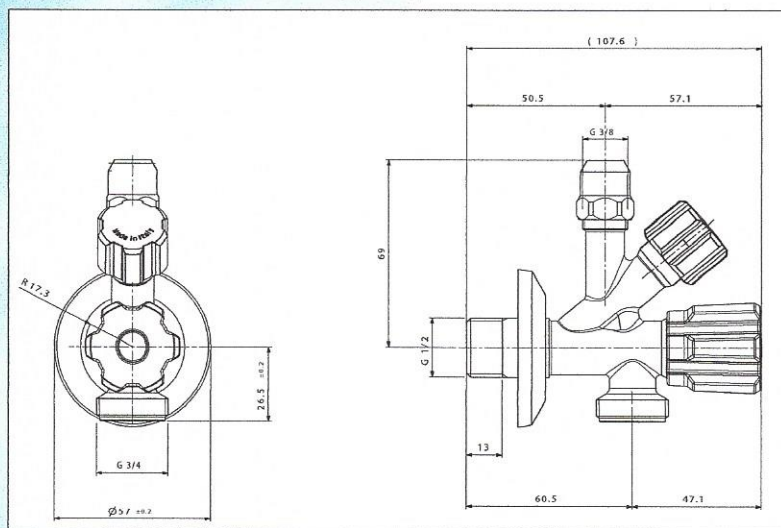

**cim 2185**

